

AVAILABLE NOW FROM LBS

# Sperrin

LOW PITCH ROOFING SOLUTION

LBS

Highly defined interlocks

Deep channel, extremely watertight


Great definition

A combination of tradition and technology can make all kinds of projects possible. The Sperrin is a versatile product which suits both the specifier and the homeowner. Three colours available as standard with others on request.

## BENEFITS

- Performs at pitches as low as 12.5° \*
- Easy to install
- 60 year guarantee

*\*Consult LBS technical department*

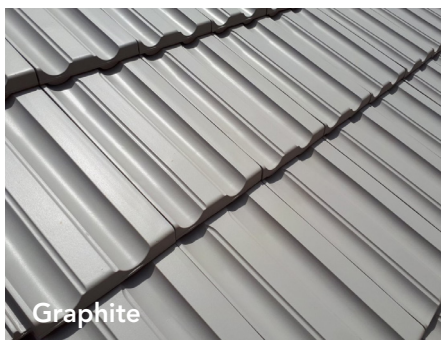


AVAILABLE FOR DELIVERY ACROSS THE UK AND IRELAND



# Sperrin

## Low Pitch Roofing Solution

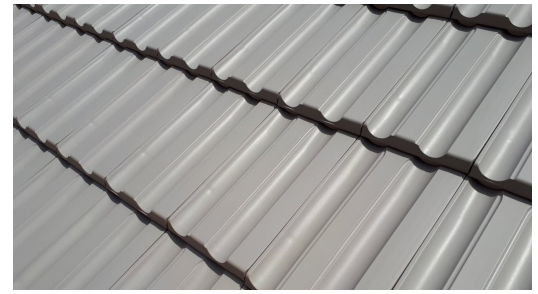

### TECHNICAL INFORMATION

Tile Size	475mm x 262mm
Colours available	Graphite, Red, Moss Red
Minimum roof pitch	12.5° *
Minimum headlap	75mm
Maximum headlap	120mm
Batten spacing at min. gauge	355mm
Batten spacing at max. gauge	400mm
Battens per m <sup>2</sup>	2.51m when fitted at 75mm headlap
Batten size	50mm x 25mm
Covering capacity per sqm	11.4 tiles per m <sup>2</sup> when fitted at 75mm headlap
Nominal cover width	220mm
Weight per tile	3.15kg
Weight as laid	36.14kg per m <sup>2</sup> when fitted at 75mm headlap
Quantity per pallet	280
Fixing from 12.5° - 17.5°	Tiles must be twice fixed with Soltera screws, and all eave tiles clipped using the Soltera fixing clip.
Fixing from 17.5° - 50°	Tiles must be twice fixed with 50mm x 3.35mm aluminium ringshank nails with clout head and all eave tiles clipped using the Soltera fixing clip.
Accessories available	Dry verge, dry ridge and ventilation products.

*\*For pitches below 12.5° and over 50°, please consult LBS Technical Department for specific fixing guidelines.*

Due to the drying and firing shrinkage in the manufacturing process, clay tiles can be subject to small variations in size. The roof tiler should inspect each batch of tiles before deciding on the batten gauge and linear coverage to ensure the correct minimum headlap and sidelap are achieved. In line with good tiling practice, it is recommended that you mix tiles from random pallets (usually 3) to achieve the best finish to the roof.



Fixing from 17.5° - 50°

## LAGAN BUILDING SOLUTIONS LTD

### NORTHERN IRELAND

Lambeg Mills  
15 Ballyskeagh Road  
Lisburn  
BT27 5SX

T 028 9264 8691

### REPUBLIC OF IRELAND

The Swan  
Athy  
County Kildare  
R14 TE81

T 01 8201551



E [info@LBSproducts.com](mailto:info@LBSproducts.com)

[LBSproducts.com](http://LBSproducts.com)